


Add custom fields on server add form

261 Manu Chacko July 2, 2024 [Productivity & Efficiency Features](#), [Technical](#) 6044

How to add custom fields on the server add form while adding a server?

Synopsis: This article helps Ezeelogin gateway users on how to add custom server fields to the server add form.

Step 1: Login to Ezeelogin GUI, click on the **settings** -> **server field** -> **add custom server field**

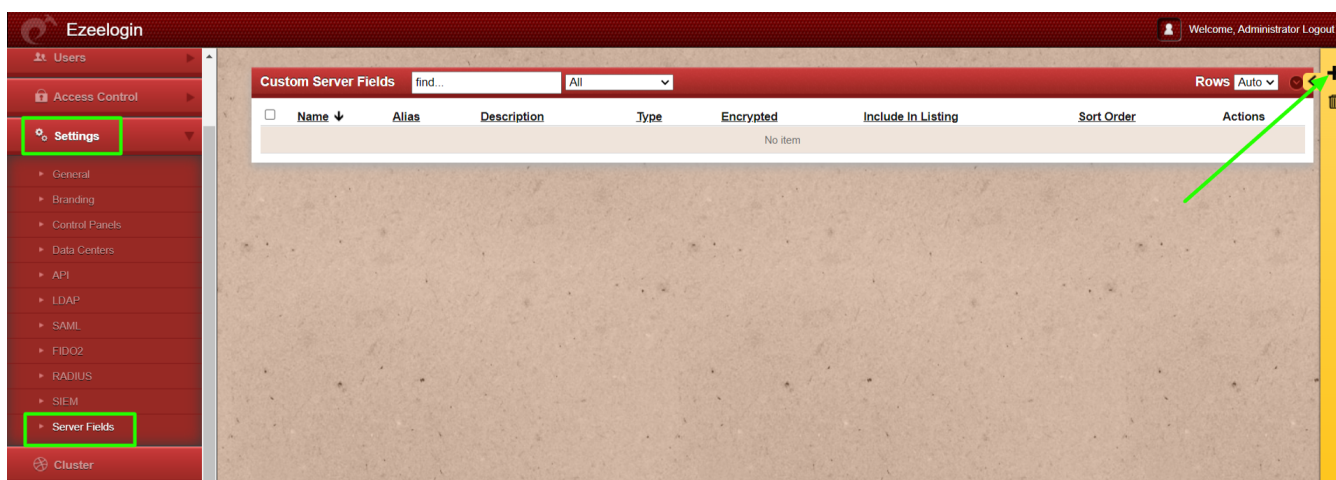

Step 2: Provide the details for the custom server field

Name: A name for the custom server field

Alias: The column title name shown in server listing.

Description: Brief description on the custom server field


Type: Type of the custom server field added.

Encrypted: Shows if the information stored in the field would be encrypted or not.


Include In Listing: If enabled, the field will be displayed in the server listing.

Sort order: The order number determines the position of the field in the server edit page. Lower values would be


Actions: To add or delete custom fields.

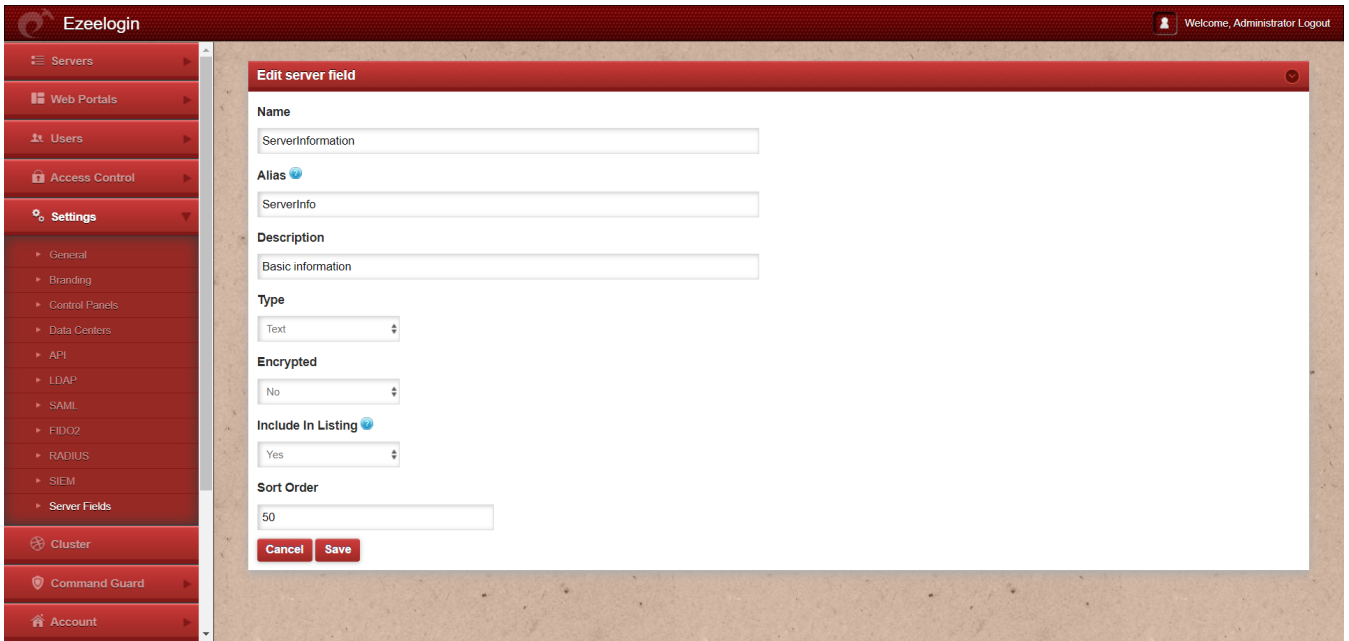



Step 3: The custom field can be viewed while adding a server by navigating to Servers -> Add Server -> Advanced section.

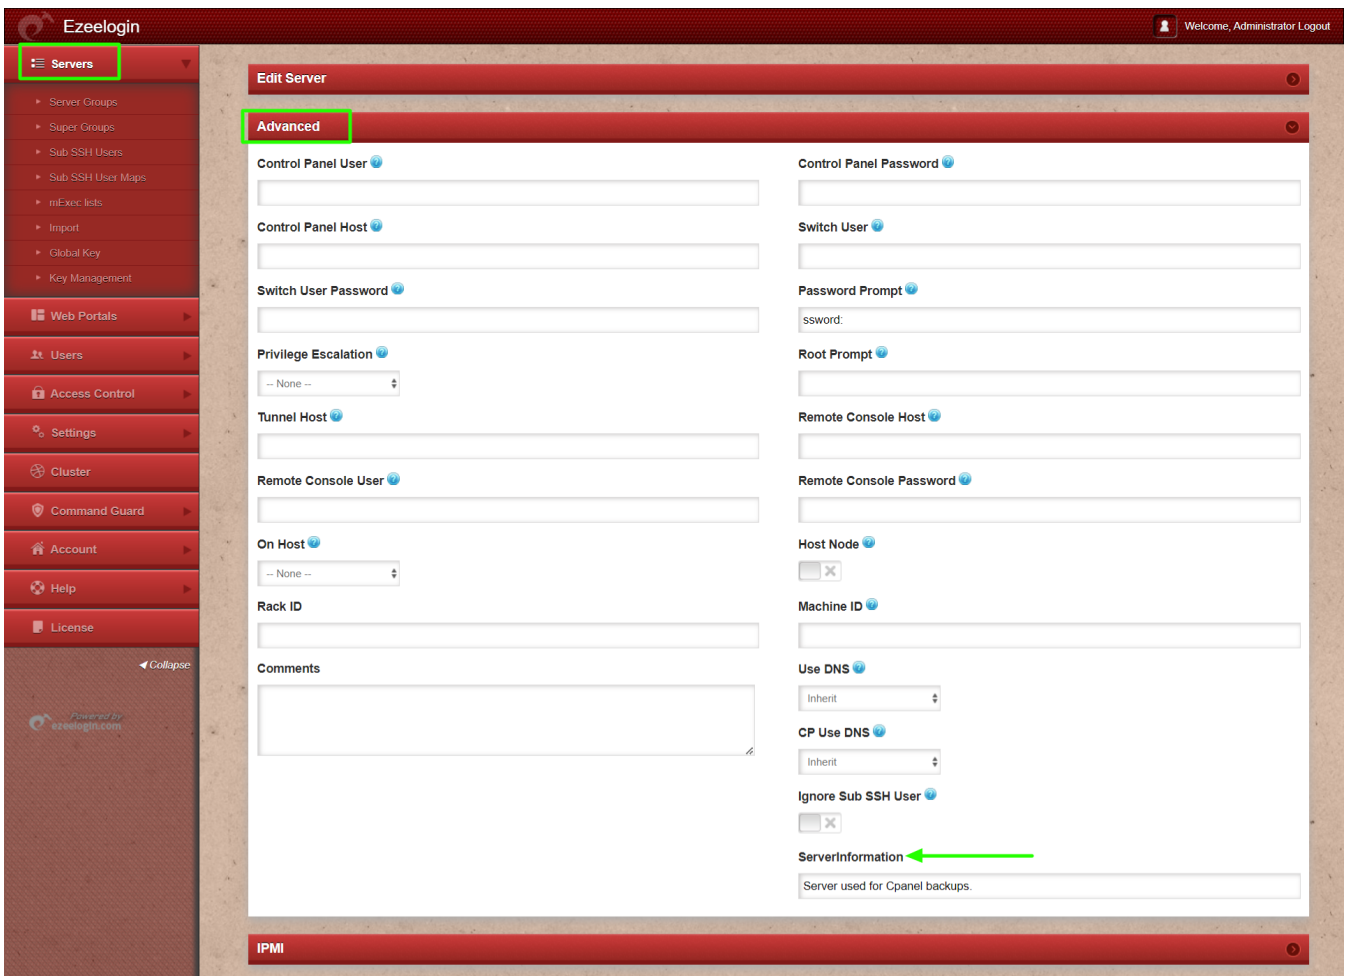

Step 4: The custom server field is displayed in the server listing when 'Include In Listing' under the name specified in the 'Alias' column.


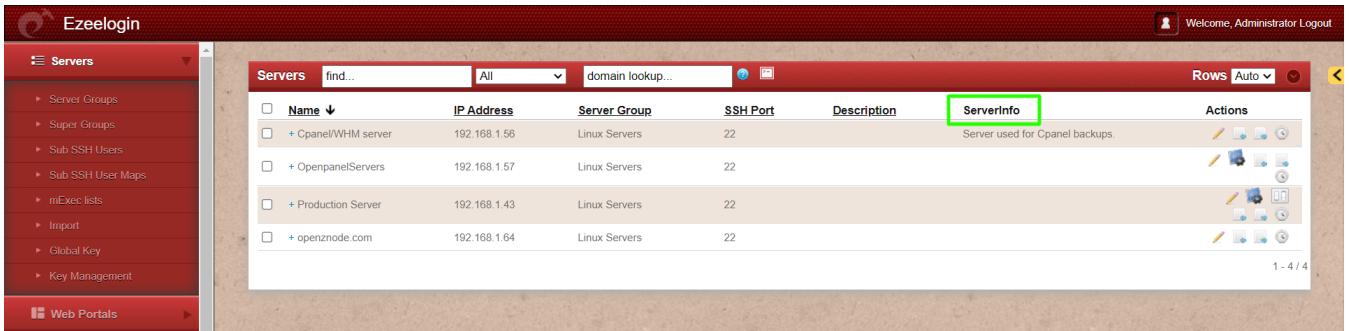


Step 4: To view custom server fields in Ezeelogin shell, make sure to enable **Show Custom Fields** in Ezeelogin GUI by clicking on the **Account -> Preferences -> Show custom fields in Ezeelogin Shell**

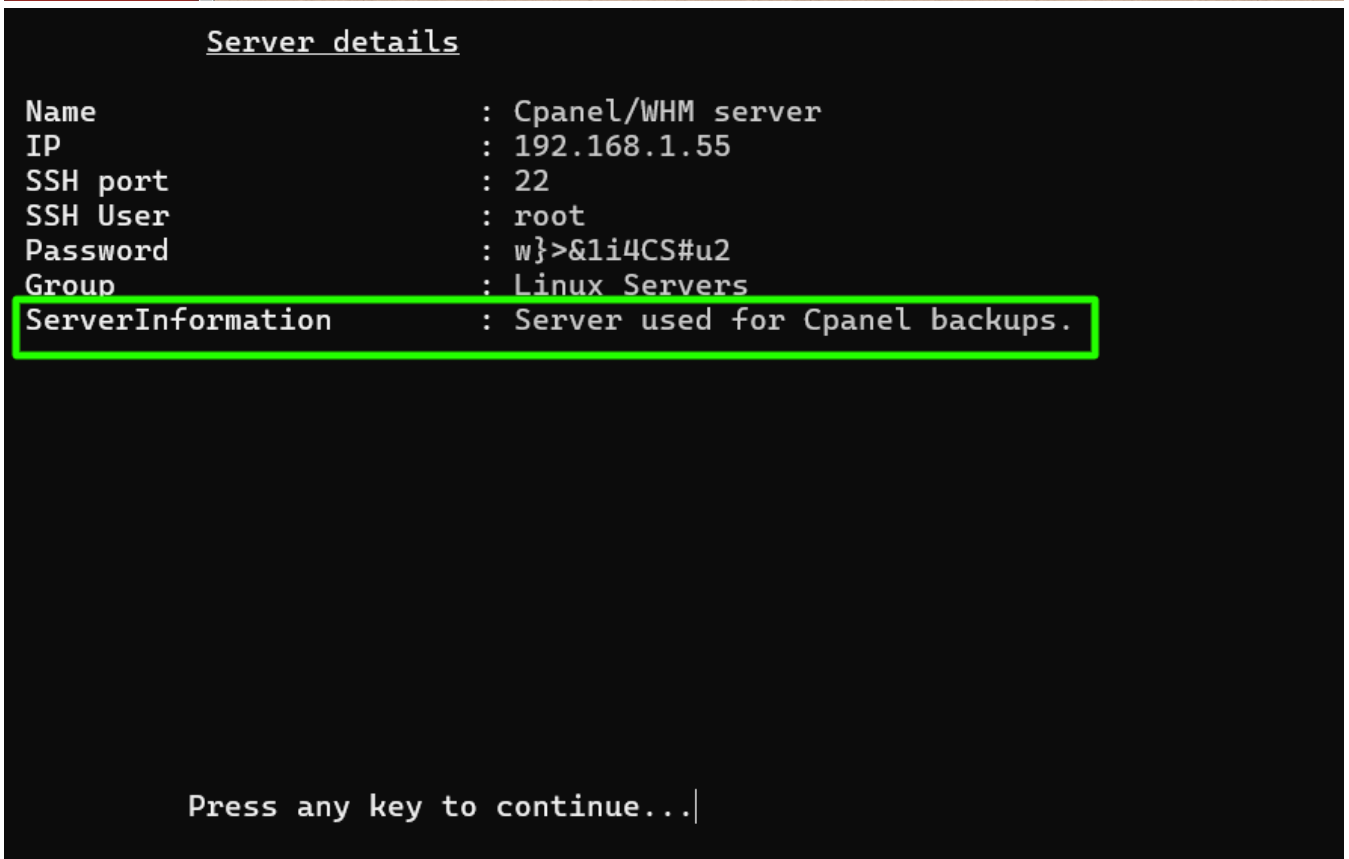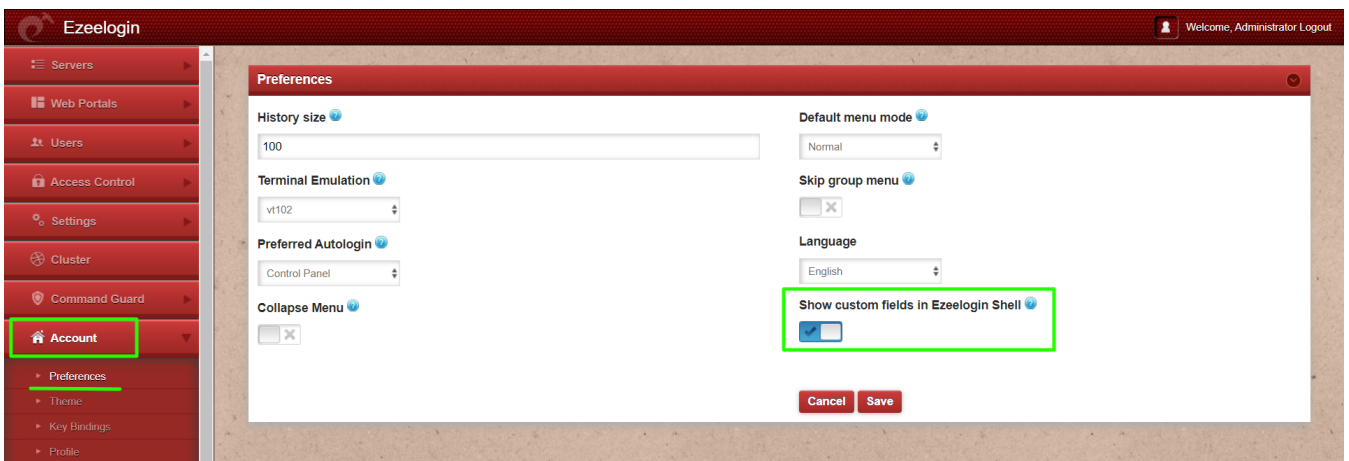

Step 5: Use the access control to grant the **custom server field access** and **view server details access**

to non admin users. Access control -> User-Action -> Servers (View Server Details) & Settings

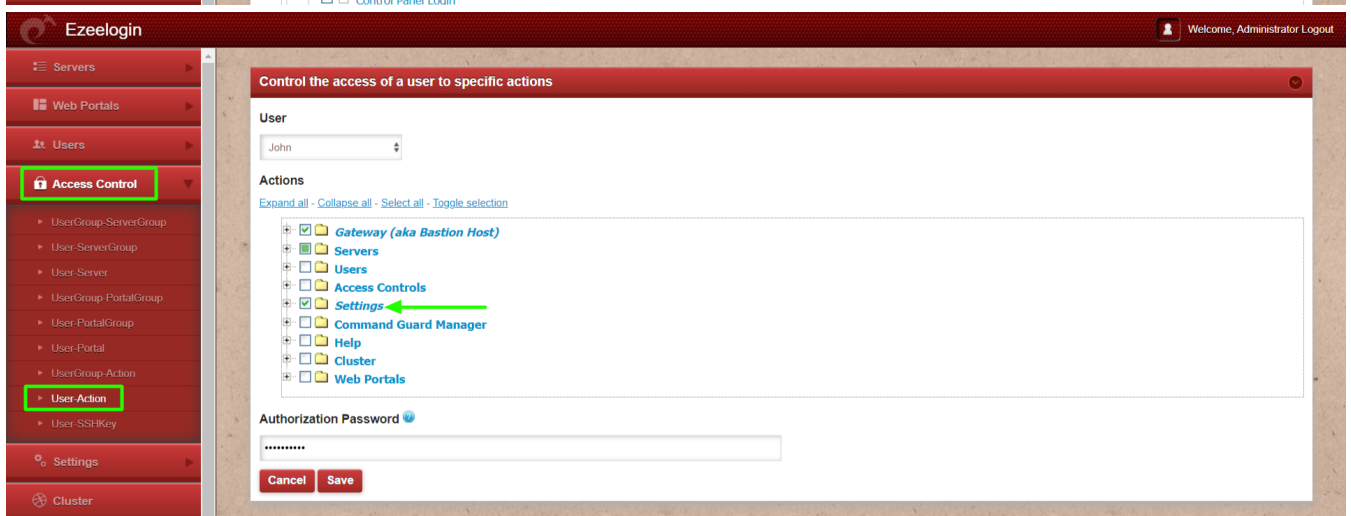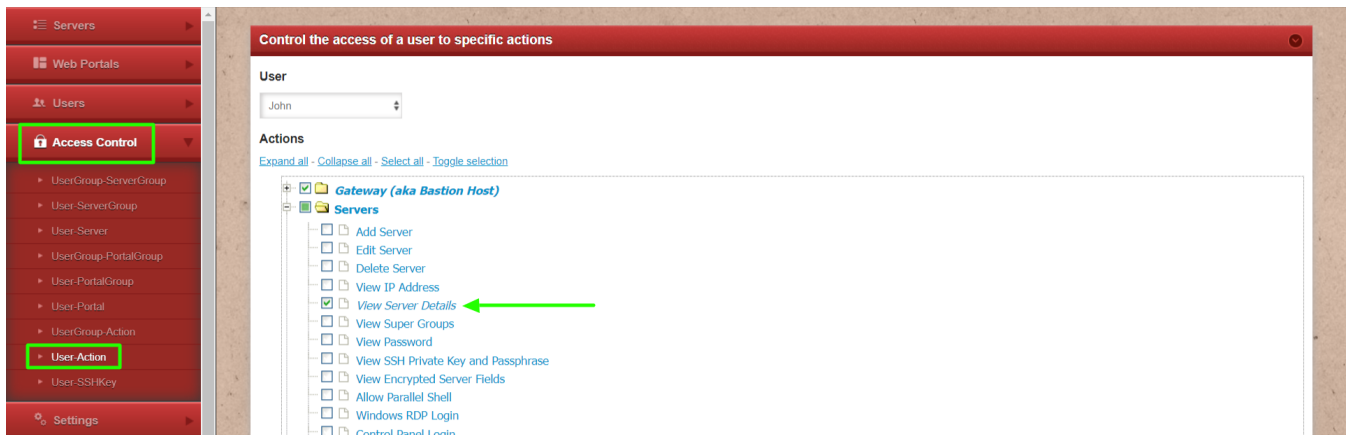

How to enable custom server field for all users in ezeelogin?

To enable custom server fields for all users, run the following command:

```
root@localhost:~# php /usr/local/ezlogin/ez_queryrunner.php "replace into prefix_preferences (user_id, name, value) select id, 'show_custom_fields_ezsh' as name, 'Y' as value from prefix_users"
```

Online URL: <https://www.ezeelogin.com/kb/article/add-custom-fields-on-server-add-form-261.html>