

How to re-add a reinstalled server?

303 Vishnupriya August 28, 2024 [General](#) 3484


Steps to re-add a reinstalled server

Overview: This article outlines the steps to re-add a reinstalled server. First, select the reinstalled remote server and reset the SSH fingerprint. After resetting, update the new password in the Server -> Edit server section.


Step 1. Select the reinstalled remote server and Click



to reset the ssh fingerprint.

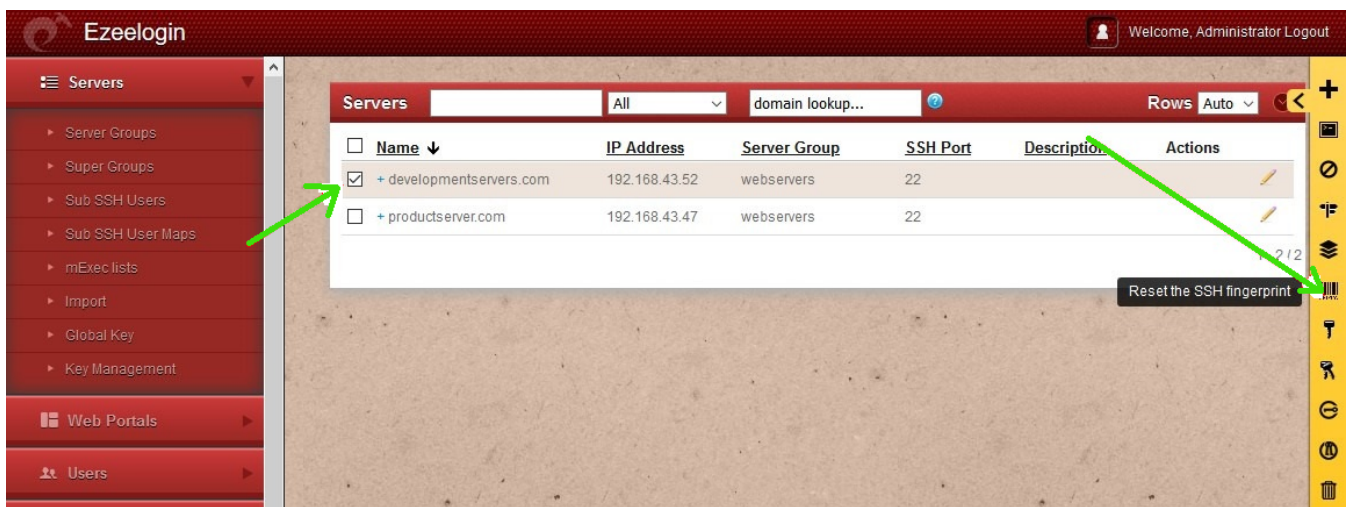

As shown below you can see the confirmation

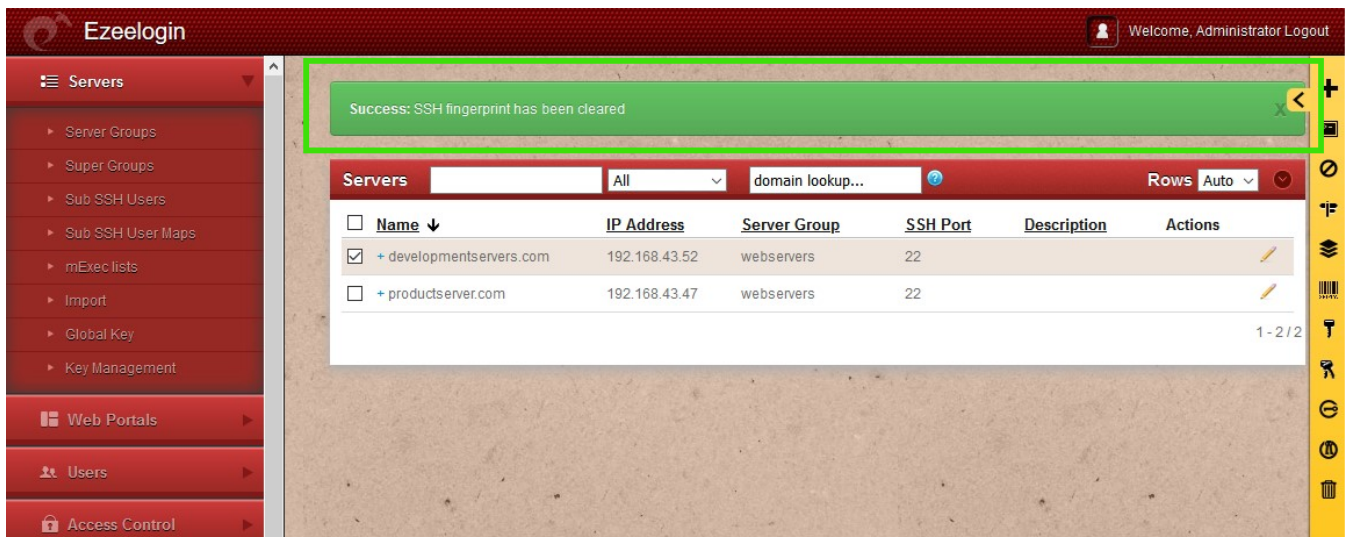

Step 2. After resetting the SSH fingerprint, you need to update the new password in **Server** -> **Edit server**

Ezeelogin Welcome, Administrator Logout

Servers

- Server Groups
- Super Groups
- Sub SSH Users
- Sub SSH User Maps
- mExec lists
- Import
- Global Key
- Key Management

Web Portals

Users

Access Control

Settings

Cluster

Command Guard

Account

Edit Server

Hostname
developmentservers.com

SSH Private Key

SSH Key Passphrase

Password Management
keep server password

SSH Port
22

Control Panel
-- None --

Description

RDP

IP Address(es)
192.168.43.52

SSH Password / RDP Password

Server Group
webservers

SSH
enabled

Remote SSH login user / RDP login user
root

Datacenter
-- None --

Windows Domain

Cancel Save

Activate Windows
Go to Settings to activate Windows.

Related Articles

[Add a Linux server or a Linux instance into the Ezeelogin ssh jumphost?](#)

[Add new server without changing the remote user password](#)

[Add / update / delete servers through ezeelogin API](#)

Online URL: <https://www.ezeelogin.com/kb/article/how-to-re-add-a-reinstalled-server-303.html>