

# How to re-add a reinstalled server?

303 Vishnupriya August 28, 2024 [General](#) 3400


## Steps to re-add a reinstalled server

**Overview:** This article outlines the steps to re-add a reinstalled server. First, select the reinstalled remote server and reset the SSH fingerprint. After resetting, update the new password in the Server -> Edit server section.


**Step 1.** Select the reinstalled remote server and Click



to reset the ssh fingerprint.

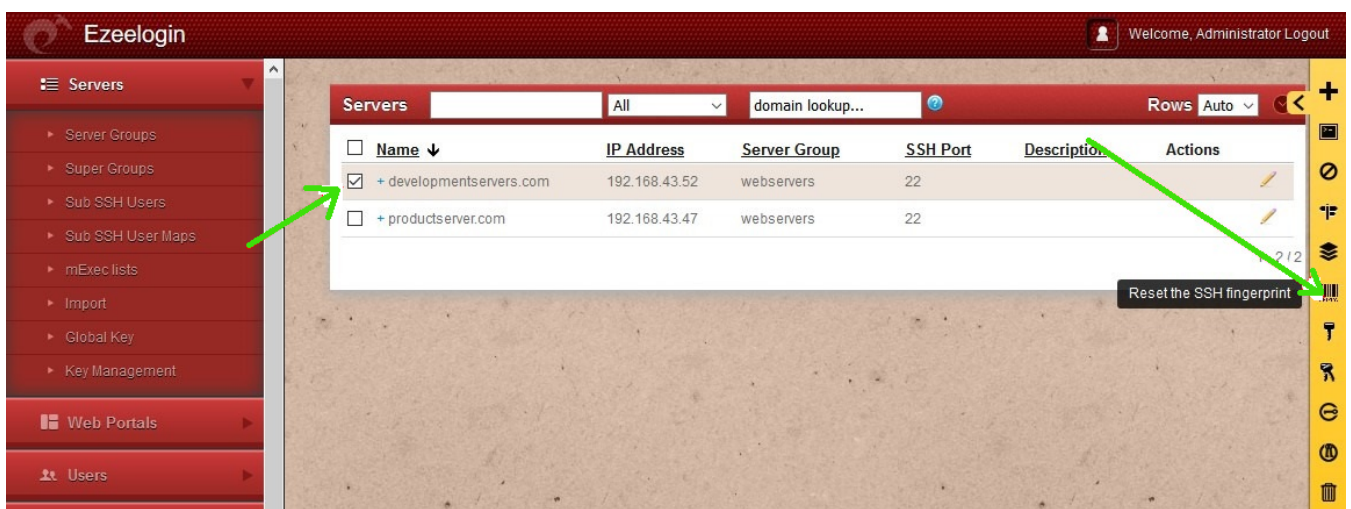

As shown below you can see the confirmation

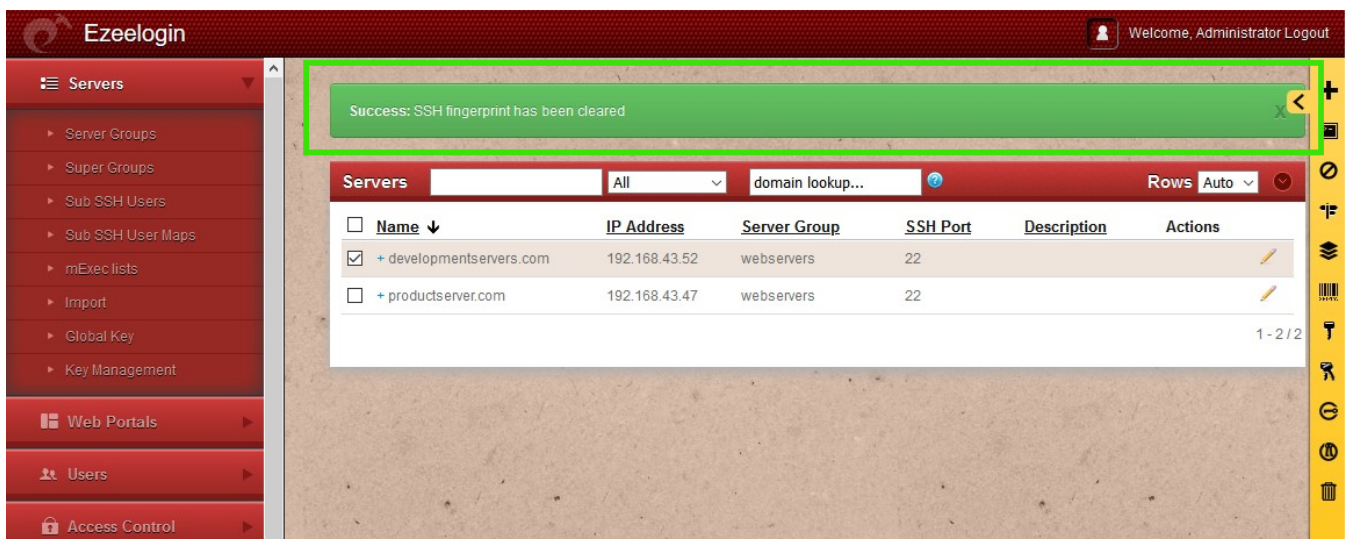

**Step 2.** After resetting the SSH fingerprint, you need to update the new password in **Server** -> **Edit server**

**Ezeelogin** Welcome, Administrator Logout

**Servers**

- Server Groups
- Super Groups
- Sub SSH Users
- Sub SSH User Maps
- mExec lists
- Import
- Global Key
- Key Management

**Edit Server**

Hostname: developmentservers.com

IP Address(es): 192.168.43.52

SSH Private Key

SSH Password / RDP Password

SSH Key Passphrase

Password Management: keep server password

SSH Port: 22

Control Panel: -- None --

Description

RDP

Server Group: webservers

SSH: enabled

Remote SSH login user / RDP login user: root

Datacenter: -- None --

Windows Domain

Cancel Save

## **Related Articles**

[Add a Linux server or a Linux instance into the Ezeelogin ssh jumphost?](#)

[Add new server without changing the remote user password](#)

[Add / update / delete servers through ezeelogin API](#)

Online URL: <https://www.ezeelogin.com/kb/article/how-to-re-add-a-reinstalled-server-303.html>