


Error: This node in cluster has local changes. Please verify database and synchronize: DB sync incomplete

361 Manu Chacko September 20, 2024 [Common Errors & Troubleshooting](#) 3408

Database sync error: This node in cluster has local changes

Overview: This article addresses the "Database Sync Error: This Node in Cluster Has Local Changes" issue. It provides a step-by-step guide for verifying and synchronizing the database through the Ezeelogin GUI, ensuring that local changes on a node are resolved by syncing with other nodes. The article also includes a FAQ on whether it's advisable to disable the slave server while using only the master node, highlighting the benefits of keeping both servers synchronized for real-time data updates.

Step 1. Click on Verify database from Ezeelogin GUI > **Cluster tab** > **Verify database.**

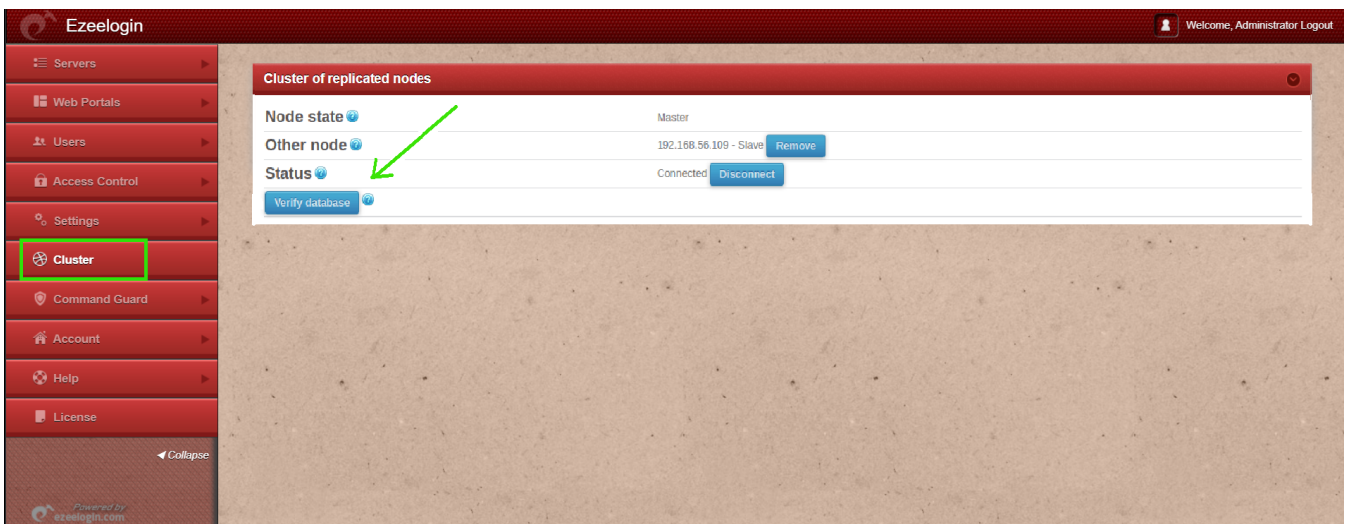

Step 2. Ezeelogin will verify the database and list the tables having different values. If you are clicking verify database from master, you may click on **Keep this node data** on master Node.

The screenshot shows the Ezeelogin interface with the 'Cluster' tab selected. A table lists the synchronization status for various tables. The 'users' table is highlighted in red, indicating a failure. A green arrow points to the error message for the 'users' table.

Table	Status
ssh_users	Success
supergroup_servergroups	Success
supergroups	Success
user_func_acs	Success
user_ips	Success
user_portal_acs	Success
user_portalgroup_acs	Success
user_server_acs	Success
user_servergroup_acs	Success
user_sshkey_acs	Success
usergroup_func_acs	Success
usergroup_portalgroup_acs	Success
usergroup_servergroup_acs	Success
usergroup_servergroup_sshuser	Success
usergroups	Success
users	Failed

Failed
 Number of records are equal
 In record 0 for the field last_login_at values are different
 In record 1 for the field last_login_at values are different
 In record 2 for the field last_login_at values are different

Keep this node data Keep other node data

Step 3. Ezeelogin will ask confirmation that Data on other node will be lost , Click on **YES**. So that the data on this node will be synced to other (slave) node.

The screenshot shows the Ezeelogin interface with the 'Cluster' tab selected. A 'Data loss alert' dialog box is displayed, asking for confirmation that data on other nodes will be lost. The 'Yes' button is highlighted with a green box. Below the dialog is a table showing the synchronization status for various tables.

Data loss alert

Data on other node will be lost! Confirm?

Yes No

Table	Status
settings	Success
commandgroup_commands	Success
commandgroups	Success
commands	Success
controlpanels	Success
datacenters	Success
files	Success
ips	Success
ldap	Success
mexelist_servers	Success
mexedists	Success
portalgroups	Success

Note: If the cluster tab lists several unsynchronized tables, each table must be synchronized one by one to ensure they are all up to date. Click on "Keep this node data" on master Node.

Example:

Here, three tables are not synchronized: Users, Usergroups, and Servers.

Select "Keep this node data" for the Users table in the master node, and then confirm by clicking "Yes."

Ezeelogin Welcome, Administrator Logout

- Servers
- Web Portals
- Users
- Access Control
- Settings
- Cluster**
- Command Guard
- Account
- Help
- License

ssh_private_keys	Success
ssh_user_credentials	Success
ssh_users	Success
supergroup_servergroups	Success
supergroups	Success
user_func_acs	Success
user_ips	Success
user_portal_acs	Success
user_portalgroup_acs	Success
user_server_acs	Success
user_servergroup_acs	Success
user_sshkey_acs	Success
usergroup_func_acs	Success
usergroup_portalgroup_acs	Success
usergroup_servergroup_acs	Success
usergroup_servergroup_sshuser	Success
users	Failed Table in my database has 3 records Table in other node database has 2 records Keep this node data Keep other node data

users

Failed
Number of records are equal
Record 0 are same in two databases
Record 1 are same in two databases
In record 2 for the field status values are different
Keep this node data **Keep other node data**

Ezeelogin Welcome, Administrator Logout

- Servers
- Web Portals
- Users
- Access Control
- Settings
- Cluster**
- Command Guard
- Account
- Help
- License

Data loss alert

Data on other node will be lost! Confirm?

Yes **No**

Verifying database tables on cluster nodes [Go back](#)

Table	Status
settings	Success
commandgroup_commands	Success
commandgroups	Success
commands	Success
controlpanels	Success
credential_history	Success
datacenters	Success
files	Success
ips	Success
ldap	Success
mexeclist_servers	Success

After that, click "Keep this node data" for Usergroups table and then click "Yes."

Ezeelogin Welcome, Administrator Logout

- Servers
- Web Portals
- Users
- Access Control
- Settings
- Cluster**
- Command Guard
- Account
- Help
- License

Powered by ezeelogin.com

In record 0 for the field prompt2 values are different
 In record 0 for the field gmi_protocol values are different
 In record 0 for the field created values are different

ssh_private_keys	Success	Keep this node data Keep other node data
ssh_user_credentials	Success	
ssh_users	Success	
supergroup_servergroups	Success	
supergroups	Success	
user_func_acs	Success	
user_ips	Success	
user_portal_acs	Success	
user_portalgroup_acs	Success	
user_server_acs	Success	
user_servergroup_acs	Success	
user_sshkey_acs	Success	
usergroup_func_acs	Success	
usergroup_portalgroup_acs	Success	
usergroup_servergroup_acs	Success	
usergroup_servergroup_sshuser	Success	
usergroups	Failed	Table in my database has 3 records. Table in other node database has 2 records. Keep this node data Keep other node data
users	Success	

Ezeelogin Welcome, Administrator Logout

- Servers
- Web Portals
- Users
- Access Control
- Settings
- Cluster**
- Command Guard
- Account
- Help
- License

Powered by ezeelogin.com

Data loss alert

Data on other node will be lost! Confirm?

Yes **No**

Verifying database tables on cluster nodes [Go back](#)

Table	Status
settings	Success
commandgroup_commands	Success
commandgroups	Success
commands	Success
controlpanels	Success
credential_history	Success
datacenters	Success
files	Success
ips	Success
ldap	Success
mexeclist_servers	Success

Next, Click on "Keep this node data" of Servers table and confirm the action.

Ezeelogin

Welcome, Administrator Logout

Servers

Web Portals

Users

Access Control

Settings

Cluster

Command Guard

Account

Help

License

▼ Collapse

Powered by ezeelogin.com

servers

In record 0 for the field name values are different
 In record 0 for the field description values are different
 In record 0 for the field password values are different
 In record 0 for the field prompt2 values are different
 In record 0 for the field ipmi_protocol values are different
 In record 0 for the field created values are different

Keep this node data Keep other node data

ssh_private_keys	Success
ssh_user_credentials	Success
ssh_users	Success
supergroup_servergroups	Success
supergroups	Success
user_func_acls	Success
user_ips	Success
user_portal_acls	Success
user_portalgroup_acls	Success
user_server_acls	Success
user_servergroup_acls	Success
user_sshkey_acls	Success
usergroup_func_acls	Success
usergroup_portalgroup_acls	Success
usergroup_servergroup_acls	Success
usergroup_servergroup_sshuser	Success
usergroups	Success
users	Success

Ezeelogin

Welcome, Administrator Logout

Servers

Web Portals

Users

Access Control

Settings

Cluster

Command Guard

Account

Help

License

▼ Collapse

Powered by ezeelogin.com

Data loss alert

Data on other node will be lost! Confirm?

Yes No

Verifying database tables on cluster nodes Go back

Table	Status
settings	Success
commandgroup_commands	Success
commandgroups	Success
commands	Success
controlpanels	Success
credential_history	Success
datacenters	Success
files	Success
ips	Success
ldap	Success
mexeclist_servers	Success

FAQ:

1. Can we disable the slave server since we are currently using only the master node?

Certainly, the choice to disable the slave server is yours, but keep a note that data synchronization between the master and slave servers will not occur if the slave is disabled. It is recommended to keep both servers running and synchronized for real-time data updates, as changes made to the master server will automatically sync with the slave server.

Related Articles

[Cluster Explained](#)

[Switching node states in Ezeelogin Cluster](#)

[Primary node showing the public ip instead of lan ip when cluster is configured](#)

[How to reset cluster keys in ezeelogin Master-slave Configuration ?](#)

[Install slave / secondary node for high availability in jump server](#)

[Could not connect to remote node database, primary server down in cluster](#)

Online URL:

<https://www.ezeelogin.com/kb/article/error-this-node-in-cluster-has-local-changes-please-verify-database-and-synchronize-db-sync-incomplete-361.html>