


# How to add Time Stamp for Command Prompt?

389 Nesvin KN July 30, 2024 [Features & Functionalities](#) 9822

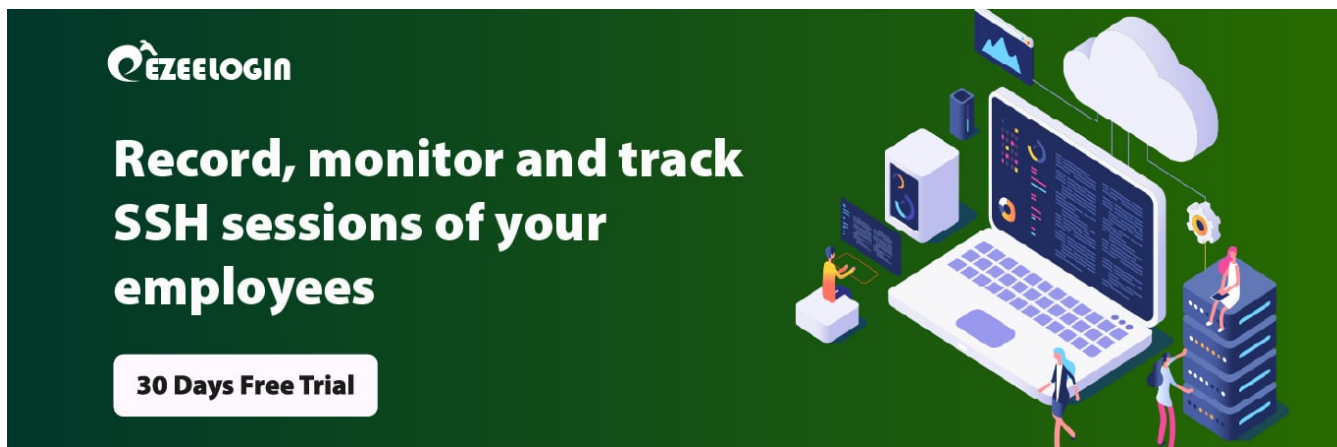

**EZELOGIN**

**Record, monitor and track  
SSH sessions of your  
employees**

**30 Days Free Trial**

## Add timestamp for command prompt in CentOS, Ubuntu, Debian, and SUSE Linux.

**Overview:** This article describes how to add timestamps to the command prompt in CentOS, Ubuntu, Debian, and SUSE Linux by editing the appropriate configuration files for each distribution.

- For **Centos**, edit `.bashrc` file and add the line at the end of the file.

```
[root@centos ~]# vi /etc/bashrc  
  
PS1="[u@h D{%Y%m%d-%H:%M:%S}]$ "
```

An example of the timestamp in Centos:-

```
[root@centos ~]# vi /etc/bashrc  
PS1="[u@h D{%Y%m%d-%H:%M:%S}]$ "
```

```
[root@centos 20210311-06:57:00]$ uptime  
06:57:04 up 14:41, 3 users, load average: 0.00, 0.01, 0.05  
[root@centos 20210311-06:57:04]$
```

- 
- For **Ubuntu** and **Debian**, create /etc/bashrc file and add the below line at end of the file.

```
root@ubuntu:~# vi /etc/bashrc  
PS1="[u@h D{%Y%m%d-%H:%M:%S}]$ "
```

1. **For the root user**, edit the **.bashrc file** and add the below lines at the end of the file.

```
root@ubuntu:~# vi /root/.bashrc  
  
if [ -f /etc/bashrc ]; then  
. /etc/bashrc  
fi
```

2. **For other users**, edit **.bashrc** in the user's home directory and add the below line at the end of the file.

```
xander@ubuntu:~# vi /home/xander/.bashrc  
  
if [ -f /etc/bashrc ]; then  
. /etc/bashrc  
fi
```

An example of a timestamp for a root user in Ubuntu:-

```
[root@ubuntu 20210313-01:47:56]$ uptime
01:48:00 up 3 days, 1:54, 4 users, load average: 0.08, 0.05, 0.01
[root@ubuntu 20210313-01:48:00]$
```

- 
- For **SUSE Linux**, edit `.profile` file of root and add below line at end of the file,

```
root@suse:~$ vi /etc/profile
PS1="[u@h D{%Y%m%d-%H:%M:%S}]$ "
```

For other users, edit `.bashrc` in the user's home directory and add the below line at the end of the file.

```
xander@suse:~# vi /home/xander/.bashrc
PS1="[u@h D{%Y%m%d-%H:%M:%S}]$ "
```

An example for a normal user in SUSE Linux:-

```
[xander@suse 20210313-01:47:56]# uptime
01:48:00 up 3 days, 1:54, 4 users, load average: 0.08, 0.05, 0.01
[xander@suse 20210313-01:48:00]#
```

---

### **Related Articles:**

[Error logs and configuration files.](#)

Online URL:

<https://www.ezeelogin.com/kb/article/how-to-add-time-stamp-for-command-prompt-389.html>