


# Integrate OpenLdap with CentOS using SSSD

446 Manu Chacko August 4, 2024 [Tweaks & Configuration](#) 6007

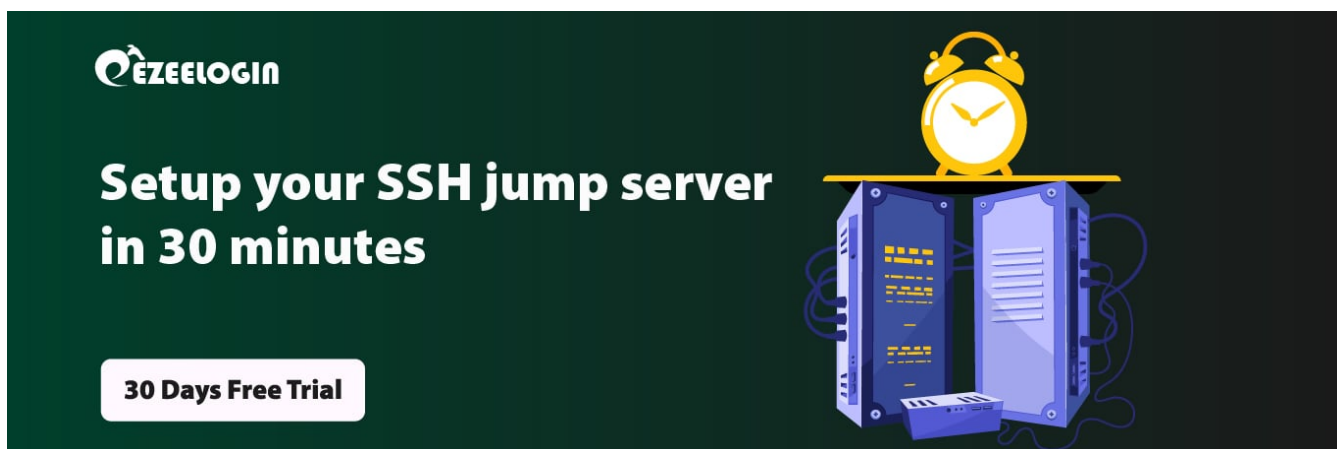

**EZELOGIN**

**Setup your SSH jump server  
in 30 minutes**

**30 Days Free Trial**

## How to integrate OpenLdap with Centos 8 using SSSD?

---

**Overview** : This article provides a step-by-step guide on installing and configuring SSSD for LDAP integration on a CentOS server, including package installation, SSSD configuration, and verification of LDAP user details.

---

Run the following commands to install the SSSD packages

```
[root@jumpserver ~]# yum install sssd sssd-client nscd -y
```

Add `ldap_search_base,ldap_default_bind_dn,ldap_default_authtok,ldap_uri` to `/etc/sss/sss.conf`

```
[sss]
services = nss, pam
config_file_version = 2
domains = default

[nss]

[pam]
offline_credentials_expiration = 60

[domain/default]
ldap_id_use_start_tls = False
cache_credentials = True
ldap_search_base = dc=ldap,dc=ez,dc=com
id_provider = ldap
auth_provider = ldap
chpass_provider = ldap
access_provider = ldap
ldap_uri = ldap://192.168.1.10
ldap_default_bind_dn = cn=admin,dc=ldap,dc=ez,dc=com
ldap_default_authtok = password
```

```
ldap_search_timeout = 50
ldap_network_timeout = 60
ldap_access_order = filter
ldap_access_filter = (objectClass=posixAccount)
override_shell = /usr/local/bin/ezsh
```

Restart sssd and nscd using below commands.

```
[root@jumpserver ~]# service sssd restart && service nscd restart
```

**Note:**

When sssd restart fails, make sure to change the permissions of sssd.conf to 600

```
[root@jumpserver ~]# chmod 600 /etc/sss/sss.conf
```

Enable autcreate home directory on login by the following command

```
authconfig --enablemkhomedir --update
```

Now run the `id / finger` command and see whether you are able to get LDAP user details

```
[root@jumpserver ~]# finger marc
```

```
Login: marc Name: Marc c
```

```
Directory: /home/marc Shell: /usr/local/bin/ezsh
```

```
Last login Wed Jun 13 05:02 (EDT) on pts/1 from 10.1.1.13
```

```
No mail.
```

```
No Plan.
```

```
[root@jumpserver ~]# id marc
```

```
uid=1001(marc) gid=20001(domain users) groups=1547600513(domain users)
```

```
root@gateway ~]# getent passwd marc
```

```
marc*:1701601108:1701600513:marc user:/home/marc@ldapad.com:/usr/local/bin/ezsh
```

Note: below command to clear the cache of the user.  
root@linuxserver ~# sss cache -r username

[Integrate Windows AD with Centos 6 using SSSD](#)

Online URL: <https://www.ezeelogin.com/kb/article/integrate-openldap-with-centos-using-sssd-446.html>