ERROR: User has not set a security code Idap sasl binds: Cannot contact LDAP server

512 Jisna Joseph July 13, 2023 Common Errors & Troubleshooting 1660

How to solve ERROR: User has not set a security code

Idap_sasl_bind_s (-1): Can't contact LDAP server

If you get this error create a softlink to the system ssl directory which can be found by executing the following command on the server.

```
[root@gateway ~]# openssl version -d


OPENSSLDIR: "/etc/pki/tls"
```


Once you get the path to the ssl dir, run the below command

```
[root@gateway ~]# ln -s path/to/ssl/dir /usr/local/ssl
for example:
[root@gateway ~]# ln -s /etc/pki/tls /usr/local/ssl
OR
```

For Ezeelogin version 7.27.6 You can **enable** skip LDAP user verification under **Settings** -> **General** -> Two factor Authentication -> skip ldap user verification which will skip LDAP user verification in Ezeelogin shell(Ezsh) and **disable** the Security code ldap under **Settings** -> **General** -> **Authentication** -> **Security code ldap** . Refer below screenshots.

If you are on a lower version of Ezeelogin refer the following article to upgrade to the latest version https://www.ezeelogin.com/kb/article/upgrade-ezeelogin-jump-server-to-the-latest-version-136.html

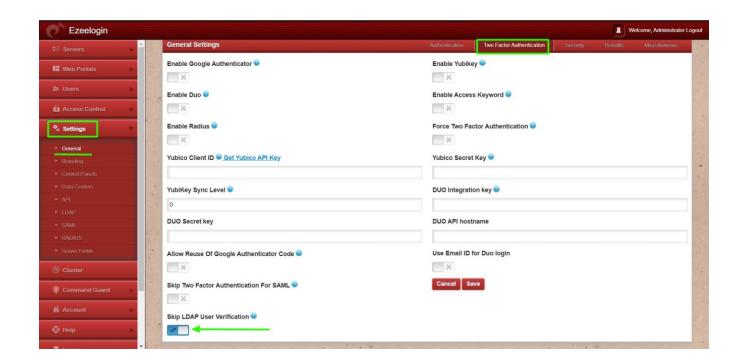

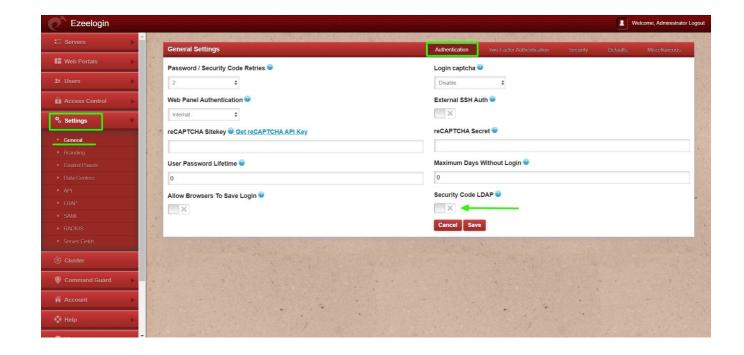

Online URL:

 $\underline{https://www.ezeelogin.com/kb/article/error-user-has-not-set-a-security-code-ldap-sasl-binds-cannot-contact-ldap-server-512.html}$