


# KEX and Host Key Algorithms in SSH

565 Nesvin KN March 21, 2025 [General](#) 30852

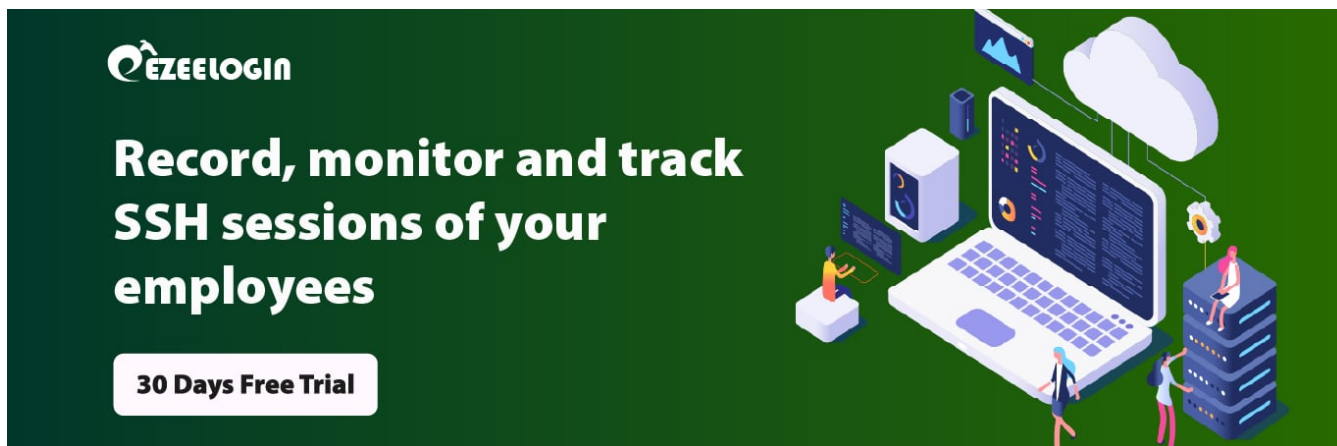

## What are KEX and Host Key Algorithms?

**Overview:** This article explains KEX and host key algorithms and guides Linux users on how to view and modify the algorithms used for SSH connections between a client and a server.

**KEX:** It is the short form of **Key Exchange**. The algorithm is chosen to compute the secret encryption key. Examples would be '**diffie-hellman-group-exchange-sha1**' and modern '**ecdh-sha2-nistp512**'.

**Public\_key** or **Server Host key:** The asymmetric encryption algorithm used in the server's private-public host key pair. Examples would be '**ssh-rsa**' and elliptic curve '**ecdsa-sha2-nistp521**'.

### 1. How to find the KEX (Key Exchange) and Host Key Algorithms in SSH?

**Step 1(A):** SSH from one linux machine to another in verbose mode to get the detailed process.

```
root@linux_server ~]# ssh username@linux_server_IP -vvv
```

**Step 1(B):** KEX and host key algorithms used to SSH can be found in **debug 1 level logs**. Refer below example of **KEX and host key algorithms**.

```
debug1: kex: algorithm: curve25519-sha256
debug1: kex: host key algorithm: ecdsa-sha2-nistp256
```

```
debug2: languages stoc:
debug2: first_kex_follows 0
debug2: reserved 0
debug2: peer server KEXINIT proposal
debug2: KEX algorithms: curve25519-sha256,curve25519-sha256@libssh.org,ecdh-sha2-nistp256,ecdh-sha2-nistp384,ecdh-sha2-nistp521,diffie-hellman-group-exchange-sha256,diffie-hellman-group16-sha512,diffie-hellman-group18-sha512,diffie-hellman-group-exchange-sha1,diffie-hellman-group14-sha256,diffie-hellman-group14-sha1,diffie-hellman-group1-sha1
debug2: host key algorithms: ssh-rsa,rsa-sha2-512,rsa-sha2-256,ecdsa-sha2-nistp256,ssh-ed25519
debug2: ciphers ctos: chacha20-poly1305@openssh.com,aes128-ctr,aes192-ctr,aes256-ctr,aes128-gcm@openssh.com,aes256-gcm@openssh.com,aes128-cbc,aes192-cbc,aes256-cbc,blowfish-cbc,cast128-cbc,3des-cbc
debug2: ciphers stoc: chacha20-poly1305@openssh.com,aes128-ctr,aes192-ctr,aes256-ctr,aes128-gcm@openssh.com,aes256-gcm@openssh.com,aes128-cbc,aes192-cbc,aes256-cbc,blowfish-cbc,cast128-cbc,3des-cbc
debug2: MACs ctos: umac-64-etm@openssh.com,umac-128-etm@openssh.com,hmac-sha2-256-etm@openssh.com,hmac-sha2-512-etm@openssh.com,hmac-sha1-etm@openssh.com,umac-64@openssh.com,umac-128@openssh.com,hmac-sha2-256,hmac-sha2-512,hmac-sha1
debug2: MACs stoc: umac-64-etm@openssh.com,umac-128-etm@openssh.com,hmac-sha2-256-etm@openssh.com,hmac-sha2-512-etm@openssh.com,hmac-sha1-etm@openssh.com,umac-64@openssh.com,umac-128@openssh.com,hmac-sha2-256,hmac-sha2-512,hmac-sha1
debug2: compression ctos: none,zlib@openssh.com
debug2: compression stoc: none,zlib@openssh.com
debug2: languages ctos:
debug2: languages stoc:
debug2: first_kex_follows 0
debug2: reserved 0
debug1: kex: algorithm: curve25519-sha256
debug1: kex: host key algorithm: ecdsa-sha2-nistp256
debug1: kex: server->client cipher: chacha20-poly1305@openssh.com MAC: <implicit> compression: none
debug1: kex: client->server cipher: chacha20-poly1305@openssh.com MAC: <implicit> compression: none
debug3: send packet: type 30
debug1: expecting SSH2_MSG_KEX_ECDH_REPLY
debug3: receive packet: type 31
debug1: Server host key: ecdsa-sha2-nistp256 SHA256:GXJh1wF70JTtuXN31hAdTuf4+PgF7RMUTVvMicierbcM
debug3: hostkeys_foreach: reading file "/root/.ssh/known_hosts"
debug3: record hostkey: found key type ECDSA in file /root/.ssh/known_hosts:1
debug3: load hostkeys: loaded 1 keys from 192.168.1.7
```

## 2. How to change the KEX and host key algorithm on the server machine(the machine you are connecting to from the client)?

**Step 2(A):** Edit the `sshd_config` file on the server machine (the machine you are connecting to from the client) and add the following lines to specify `KexAlgorithms` and `HostKeyAlgorithms`.

```
root@linux_server ~]# vim /etc/ssh/sshd_config  
  
KexAlgorithms diffie-hellman-group16-sha512  
HostKeyAlgorithms rsa-sha2-512
```

**Step 2(B):** Restart the SSHD service to apply the changes made in `sshd_config`.

```
root@linux_server ~]# systemctl restart sshd
```

**Step 2(C):** SSH from the client machine to the server machine to view the changed **KEX and host key algorithms**.

```
root@linux_server ~]# ssh username@linux_machine_IP -vvv  
  
debug1: kex: algorithm: diffie-hellman-group16-sha512  
debug1: kex: host key algorithm: rsa-sha2-512
```

```
debug2: compression stoc: none,zlib@openssh.com,zlib
debug2: languages ctos:
debug2: languages stoc:
debug2: first_kex_follows 0
debug2: reserved 0
debug2: peer server KEXINIT proposal
debug2: KEX algorithms: diffie-hellman-group16-sha512
debug2: host key algorithms: ssh-rsa,rsa-sha2-512,rsa-sha2-256
debug2: ciphers ctos: chacha20-poly1305@openssh.com,aes128-ctr,aes192-ctr,aes256-ctr,aes128-gcm@openssh.com,aes256-gcm
@openssh.com,aes128-cbc,aes192-cbc,aes256-cbc,blowfish-cbc,cast128-cbc,3des-cbc
debug2: ciphers stoc: chacha20-poly1305@openssh.com,aes128-ctr,aes192-ctr,aes256-ctr,aes128-gcm@openssh.com,aes256-gcm
@openssh.com,aes128-cbc,aes192-cbc,aes256-cbc,blowfish-cbc,cast128-cbc,3des-cbc
debug2: MACs ctos: umac-64-etm@openssh.com,umac-128-etm@openssh.com,hmac-sha2-256-etm@openssh.com,hmac-sha2-512-etm@op
enssh.com,hmac-sha1-etm@openssh.com,umac-64@openssh.com,umac-128@openssh.com,hmac-sha2-256,hmac-sha2-512,hmac-sha1
debug2: MACs stoc: umac-64-etm@openssh.com,umac-128-etm@openssh.com,hmac-sha2-256-etm@openssh.com,hmac-sha2-512-etm@op
enssh.com,hmac-sha1-etm@openssh.com,umac-64@openssh.com,umac-128@openssh.com,hmac-sha2-256,hmac-sha2-512,hmac-sha1
debug2: compression ctos: none,zlib@openssh.com
debug2: compression stoc: none,zlib@openssh.com
debug2: languages ctos:
debug2: languages stoc:
debug2: first_kex_follows 0
debug2: reserved 0
debug1: kex: algorithm: diffie-hellman-group16-sha512
debug1: kex: host key algorithm: rsa-sha2-512
debug1: kex: server->client cipher: chacha20-poly1305@openssh.com MAC: <implicit> compression: none
debug1: kex: client->server cipher: chacha20-poly1305@openssh.com MAC: <implicit> compression: none
debug2: bits set: 2030/4096
debug3: send packet: type 30
debug1: expecting SSH2_MSG_KEX_ECDH_REPLY
debug3: receive packet: type 31
debug1: Server host key: ssh-rsa SHA256:7cr32AGB+4aTWbg3L+5gS+WUK17GAI5WF65sMCnWg/I
debug3: hostkeys_foreach: reading file "/root/.ssh/known_hosts"
debug3: record hostkey: found key type ECDSA in file /root/.ssh/known_hosts:1
```

### 3. How to view the list of KEX and Keys in the Linux server?

**Step 3(A):** Run below command to list **keys** in the Linux server.

```
root@linux_server ~]# ssh -Q key  
  
ssh-ed25519  
ssh-ed25519-cert-v01@openssh.com  
ssh-rsa  
ssh-dss  
ecdsa-sha2-nistp256  
ecdsa-sha2-nistp384  
ecdsa-sha2-nistp521  
ssh-rsa-cert-v01@openssh.com  
ssh-dss-cert-v01@openssh.com  
ecdsa-sha2-nistp256-cert-v01@openssh.com  
ecdsa-sha2-nistp384-cert-v01@openssh.com  
ecdsa-sha2-nistp521-cert-v01@openssh.com
```

**Step 3(B):** Run below command to list **KEX** in the Linux server.

```
root@linux_server ~]# ssh -Q kex  
  
diffie-hellman-group1-sha1  
diffie-hellman-group14-sha1  
diffie-hellman-group14-sha256  
diffie-hellman-group16-sha512  
diffie-hellman-group18-sha512  
diffie-hellman-group-exchange-sha1  
diffie-hellman-group-exchange-sha256  
ecdh-sha2-nistp256  
ecdh-sha2-nistp384  
ecdh-sha2-nistp521  
curve25519-sha256  
curve25519-sha256@libssh.org
```

## Related Articles:

[DSA key based authentication is not working](#)

[signature algorithm ssh-rsa not in PubkeyAcceptedAlgorithms](#)

[signature algorithm ssh-dss not in PubkeyAcceptedAlgorithms](#)

Online URL: <https://www.ezeelogin.com/kb/article/kex-and-host-key-algorithms-in-ssh-565.html>

