

Access different servers with different subssh users

674 Lekshmi April 19, 2025 [Features & Functionalities](#) 934

How a gateway user can login to different servers with different SubSSH users?

Overview: This article explain how to assign and map subSSH users to specific server and user groups in Ezeelogin for controlled SSH access.

To access different servers with distinct subSSH users, it's possible to map various subSSH users with different server groups using the subSSH user map option in the Ezeelogin GUI.

Subssh user means it adds system users on remote servers. Enables you to login as those non-privileged users remotely instead of root.

Follow the steps below to log in to a different server with different subSSH user.

Step 1: Create a user and assign them to a user group.

Ezeelogin

Welcome, Administrator Logout

Servers

Web Portals

Users

User Groups

Authentication Log

SSH Log

RDP Recording

SCP Log

Web Proxy Log

Web Proxy Activity

Web Activity

Shell Activity

Server Activity

Work Summary

Status

Access Control

Settings

Cluster







Command Guard

Users

find...

All

Rows Auto


	Username	First Name	Last Name	Email	Status	Expiry	User Group	Actions
<input type="checkbox"/>	Janvi	Janvi		Janvi@gmail.com	Active		Develop	  
<input type="checkbox"/>	admin	Administrator			Active		Admins	  

1 - 2 / 2

In the above screenshot, the user 'Janvi' has been created and assigned to the 'Develop' group.

[How to add a SSH gateway user in Ezeelogin?](#)

Step 2: Assign the servers to different server groups

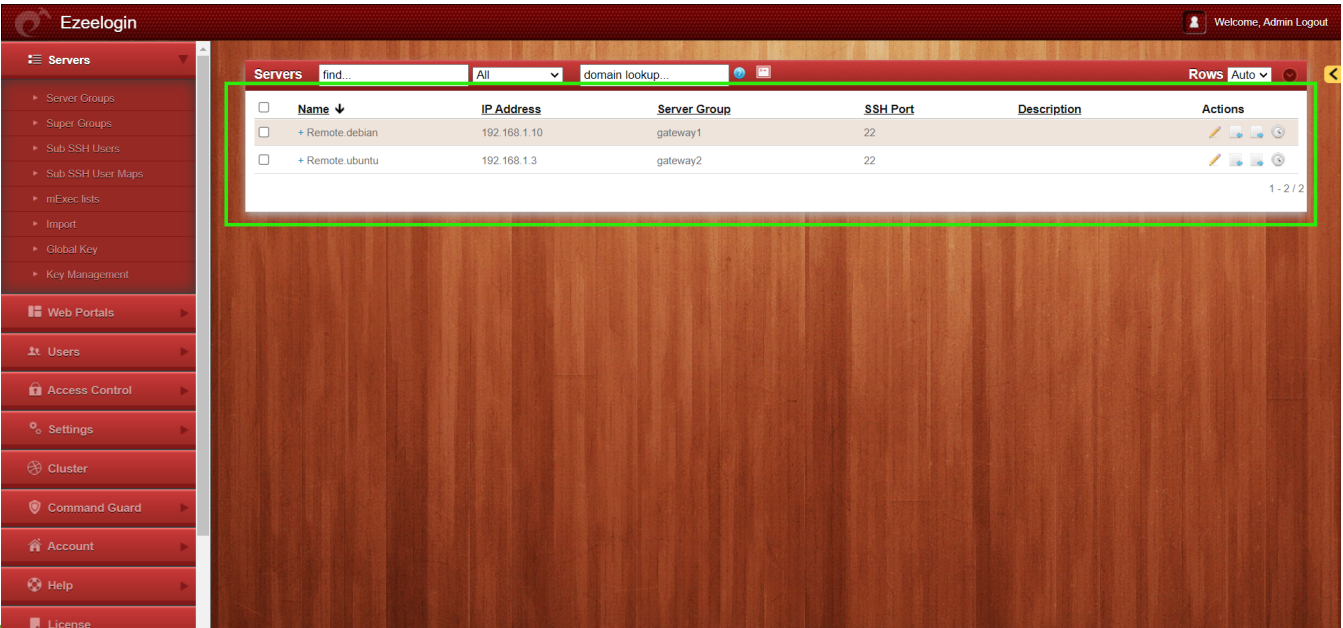

[Add a Linux server or a Linux instance into the Ezeelogin ssh jumphost?](#)

Step 3: Add the SubSSH users.

Ezeelogin

Sub SSH Users

find...

All

Rows Auto

1 - 2 / 2

Username	Groups	Type	Actions
Jude	group	Managed	
Dany	group	Managed	

Servers

Server Groups

Super Groups

Sub SSH Users

Sub SSH User Maps

mExec lists

Import

Global Key

Key Management

Web Portals

Users

Access Control

Settings

Cluster

Command Guard

Account

Help

License

Here, two sub-SSH users are added: 'Jude' and 'Dany'.

[SubSSH user explained](#)

Step 4: Establish a mapping with subSSH users between the user group created earlier and the server groups to which the remote servers belong.

Ezeelogin

Welcome, Admin Logout

Servers

Server Groups

Super Groups

Sub SSH Users

Sub SSH User Maps

mExec lists

Import

Global Key

Key Management

Web Portals

Users

Access Control

Settings

Cluster

Command Guard

Account

Help





License

Sub SSH User Maps

find...

All

Rows Auto

<input type="checkbox"/>	User Group ↓	Server Group ↓	Sub SSH User ↓	Actions
<input type="checkbox"/>	Develop	gateway2	Dany	 
<input type="checkbox"/>	Develop	gateway1	Jude	 

1 - 2 / 2

In the above screenshot, subSSH user 'Jude' is mapped to the user group 'Develop' and server group 'gateway1'. SubSSH user 'Dany' is mapped to server group 'gateway2' and user group 'Develop'.

Map the same user added user group that needs to log in to different servers. **If a user is mapped with an individual subSSH user, they will log in as the subSSH user. Consequently, the group mapping will not take effect in this scenario.**

Step 5. Login through backend to check the mapping

```
root@gateway ~]# ssh user@Ezlogin_ip
```

Example: root@gateway ~]# ssh Janvi@192.168.1.9

```
*gateway1  test
gateway2  test
All servers List of all accessible servers
```

```
GROUPS [Normal / ] {User: Janvi}
Start typing name to locate. ESC: Clear search, F1/+: Help, F4/!: Exit.
```


In the above screenshot, user 'Janvi' logged into the backend, displaying the groups that are accessible to them.

Select the 'gateway1' server group option and confirm the user details by pressing the 'Tab' key.

Server details

Name : Remote.debian
IP : 192.168.1.10
SSH port : 22
Sub SSH User : Jude
Password : Jfr!jRjsFQHxzH6SVUGjJd
Actual SSH User : root
Actual Password : root
SSH Key : Press space to show key
Passphrase : vuwvsfvj3J{rUvvknMK
Group : gateway1

Press any key to continue...

SERVERS [gateway1] (group) [Normal /] {User: Janvi}
Start typing name to locate. ESC: Clear search, F1/+: Help, F4/!: Exit.

Logged in as the Sub SSH user 'Jude' to the 'Remote.ubuntu' server in the 'gateway1' server group.

```
Jude@Remote:~$ whoami
Jude
Jude@Remote:~$
```

Select the 'gateway2' server group option, and confirm the user details by pressing the 'Tab' key.

Server details

Name : Remote.ubuntu
IP : 192.168.1.5
SSH port : 22
Sub SSH User : Dany
Password : bNB@VFFFBPSA2kuPXS
Actual SSH User : root
Actual Password : root
SSH Key : Press space to show key
Passphrase : Y}FMt8Hj
Group : gateway2

Press any key to continue...**█**

SERVERS [gateway2] (group) [Normal /] {User: Janvi}
Start typing name to locate. ESC: Clear search, F1/+: Help, F4/!: Exit.

Logged in as the Sub SSH user 'Dany' to the 'Remote.ubuntu' server in the 'gateway2' server group.

```
Dany@Remote:~$ whoami
Dany
Dany@Remote:~$ █
```


Mapping different subSSH users to various server and user groups is beneficial for accessing different servers with distinct subSSH users.

In this scenario, a user (Janvi) is added to the user group (Develop), and two different servers (Remote.debian and Remote.ubuntu) are added to two distinct server groups (gateway1 and gateway2).

After creating two different subSSH users (Jude and Dany), map these subSSH users with different server groups (gateway1 and gateway2) and the user group ('Develop' to which the Janvi user belongs).

A subSSH user (Jude) is mapped to a server group (gateway1) and user group (Develop). This means when a member of the user group (Develop) logs in to any server from the server group (gateway1), they will log in as the subSSH user that we have mapped with them.

Related Articles

[Different types of Users in Ezeelogin](#)

[How to create sub ssh user through non-root user access](#)

[How to change mapped sub ssh group](#)

[Unmanaged SubSSH User](#)

[User identity and access management in SSH](#)

Online URL:

<https://www.ezeelogin.com/kb/article/access-different-servers-with-different-subssh-users-674.html>