

Deleting entries from mysql database table webactivity_logs


733 Jisna Joseph September 12, 2024 [Migration & Maintenance](#), [Productivity & Efficiency Features](#) 436

Remove entries from the webactivity_logs table in a MySQL database?

Overview: This article explains how to delete entries from Ezeelogin webactivity_logs Table. It would be required to reduce the size of the webactivity_logs table as it would cause the Ezeelogin software upgrade to slow down significantly (2-4 hours) because of the huge size of the database table.

1. View webactivity logs

Step 1(A): To view the webactivity logs login to Ezeelogin GUI, navigate to **Users** -> [WebActivity](#) -> **Web Activity Logs**.

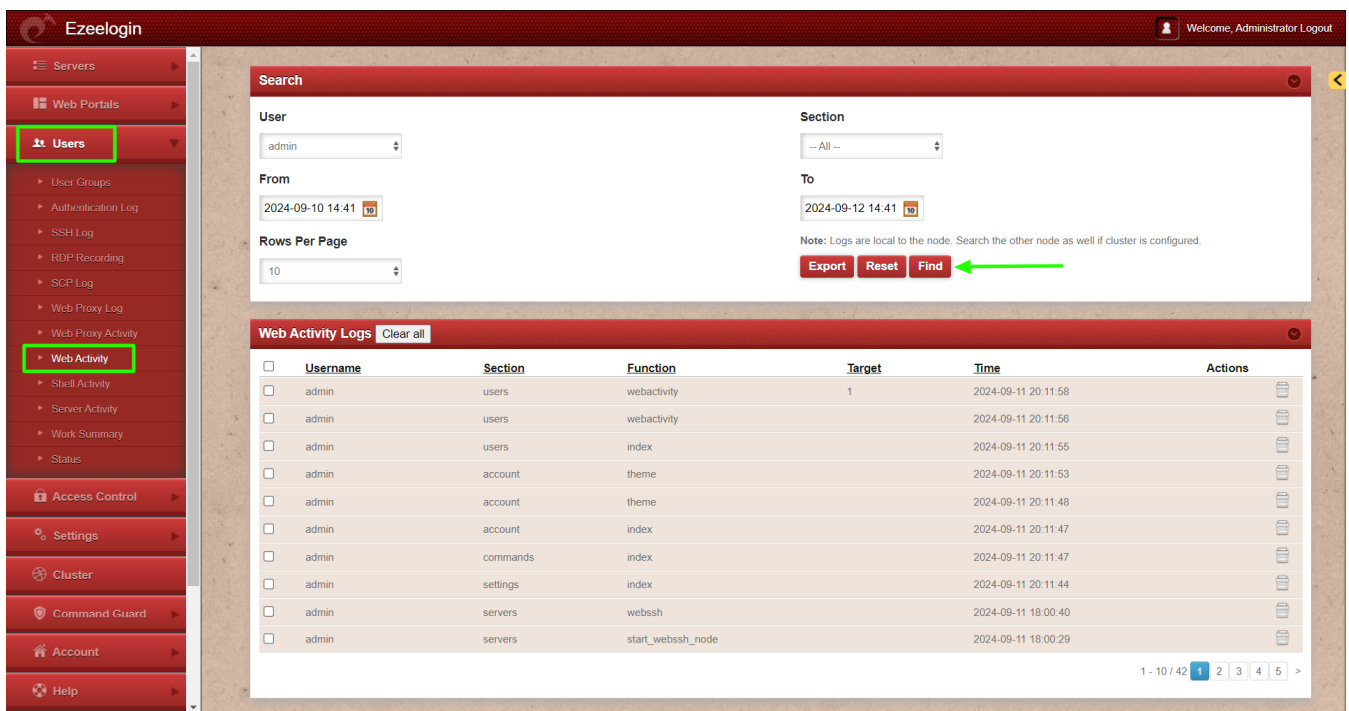

The screenshot shows the Ezeelogin GUI interface. On the left sidebar, the 'Users' and 'Web Activity' menu items are highlighted with green boxes. The main content area displays the 'Web Activity Logs' section. At the top, there is a search bar with fields for 'User' (set to 'admin'), 'Section' (set to '-- All --'), 'From' (2024-09-10 14:41), and 'To' (2024-09-12 14:41). Below the search bar, there are 'Export', 'Reset', and 'Find' buttons. A green arrow points to the 'Find' button. The 'Web Activity Logs' table is displayed below, with columns for Username, Section, Function, Target, Time, and Actions. The table contains 10 rows of log entries. At the bottom right of the table, there is a pagination control showing '1 - 10 / 42' and page numbers 1, 2, 3, 4, 5.

2. Export webactivity logs

Step 2(A): Before truncating the webactivity_logs you can export the logs from GUI for audit purposes under **Users** -> **Web Activity** -> **Export**

Generate a mysql dump of the Ezeelogin database or a table dump before you perform the operation in case you need to revert due to any unforeseen reasons. Run below command to take the database dump. Be sure to replace the database name with the actual name found in /usr/local/etc/ezlogin/ez.conf.

```
root@gateway:~# mysqldump ezlogin_wggmp > ezlogin_wggmp.sql
```

3. Truncate webactivity logs

Step 3(A): Run the below command to generate a backup of the webactivity logs table.

```
root@gateway:~# mysqldump -u root -p $(grep -oP 'db_names+KS+' /usr/local/etc/ezlogin/ez.conf) $(grep -oP 'db_prefixs+KS+' /usr/local/etc/ezlogin/ez.conf)webactivity_logs > $(grep -oP 'db_prefixs+KS+' /usr/local/etc/ezlogin/ez.conf)webactivity_logs_$(date +%Y-%m-%d).sql
```

Step 3(B): After taking backup, run below command to delete the entries in the table webactivity_logs using the Ezeelogin query runner script.It would remove the entries before the date 2023-01-01 from the logs table

```
root@gateway:~# php /usr/local/ezlogin/ez_queryrunner.php "delete from prefix_webactivity_logs where created < '2023-01-01' "
```

Step 4: The webactivity_logs table would look as follows:

```
mysql> use db_name;  
  
mysql> desc hnil_webactivity_logs;
```

Related Articles:

[Deleting entries in the mysql database table serveractivity_logs](#)

[Deleting entries in the mysql database table gwactivity_logs](#)

[Truncate the ssh session logs recorded](#)

Online URL:

https://www.ezeelogin.com/kb/article/deleting-entries-from-mysql-database-table-webactivity_logs-733.html