

# How to configure Yubikey two factor authentication in ssh ?

75 admin November 22, 2024 [Features & Functionalities](#), [Tweaks & Configuration](#) 19101

## How to enable/disable Yubikey 2FA (Two-factor Authentication) in Ezeelogin?

---


**Overview:** This article provides a comprehensive guide on configuring and managing Yubikey two-factor authentication (2FA) for SSH jump host.

---


Refer to the YouTube video to [Configure Yubikey's two-factor authentication](#) in ssh jump host.

### 1. How to enable Yubikey?


**Step 1(A):** Log in to the Ezeelogin GUI as an admin privileged user, navigate to **Settings -> General -> Two Factor Authentication**, and enable Yubikey.

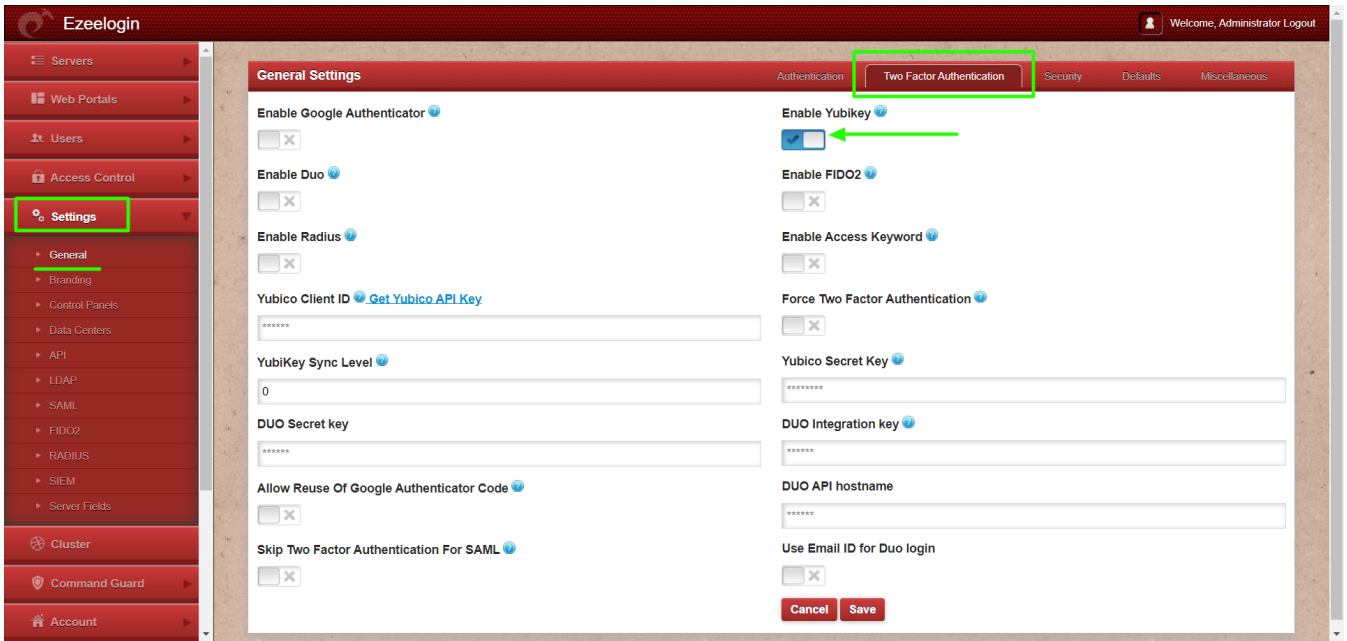


**Step 1(B):** Click on "Get Yubico API Key" to obtain the Yubico Client ID and secret key.

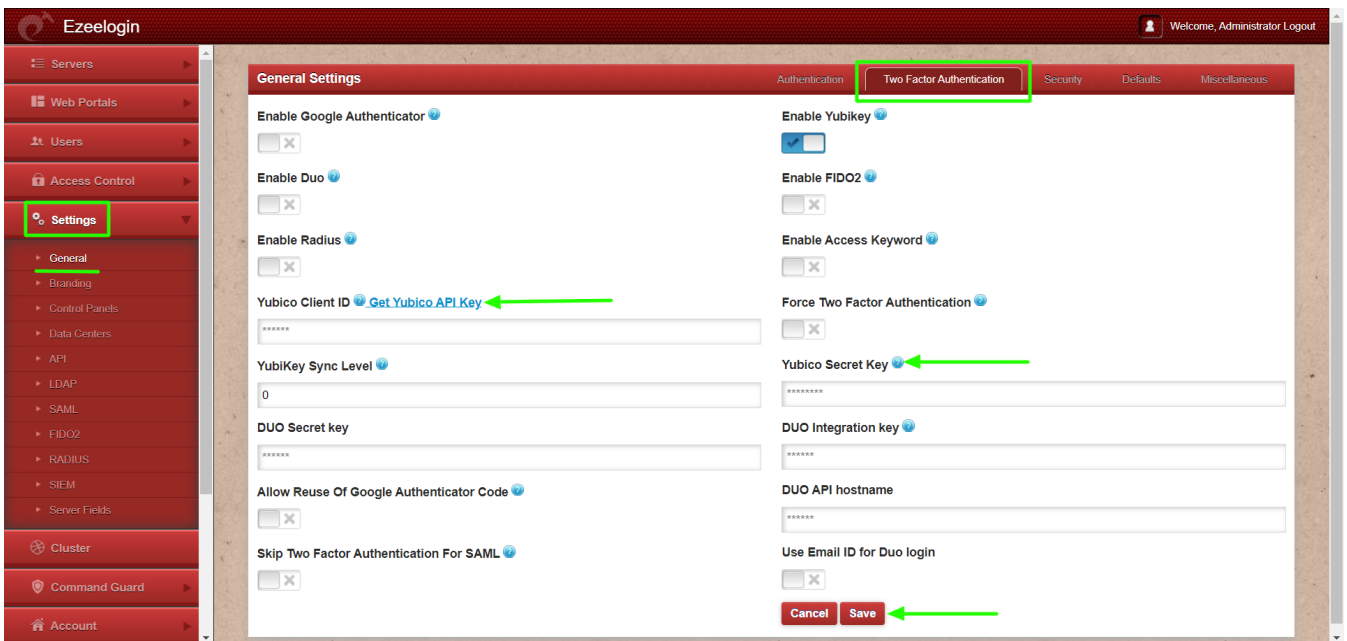

**Step 1(C):** To set up Yubikkey for user authentication, navigate to **Account** -> **Password** -> **New Yubikkey** and click on **save** after providing the authorization password(password of the currently logged in user).

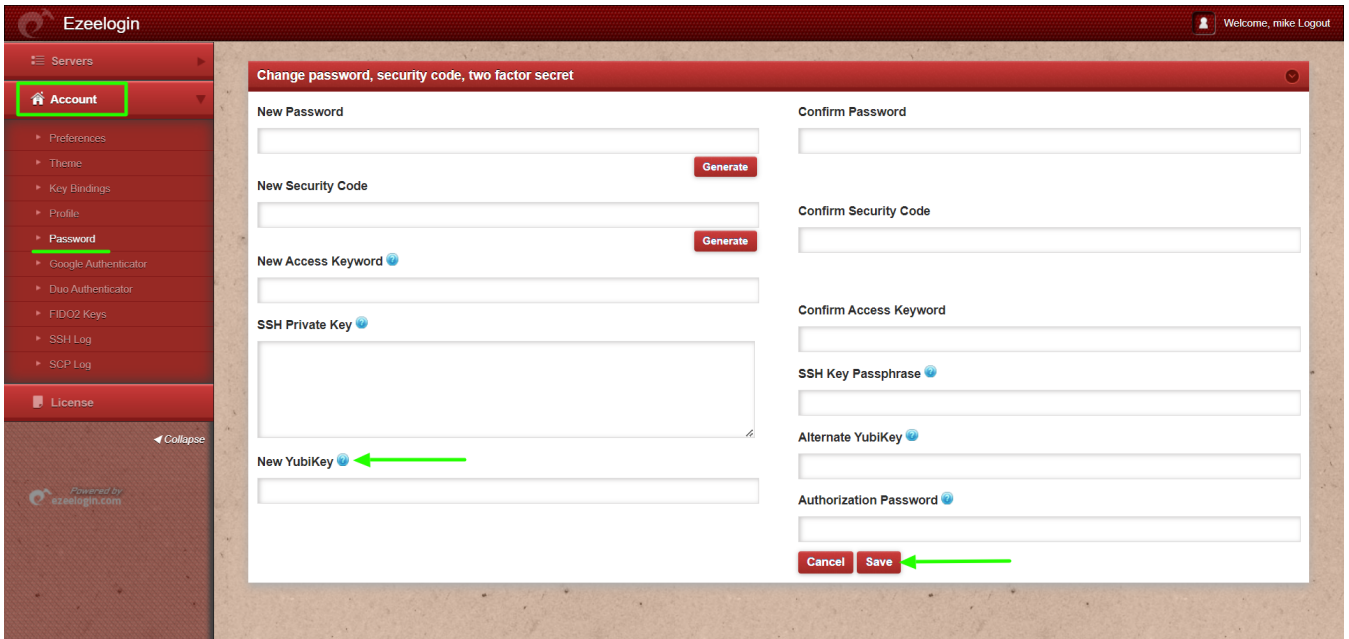

**Step 1(D):** Log in to the Ezeelogin GUI using the Yubikey 2FA method.

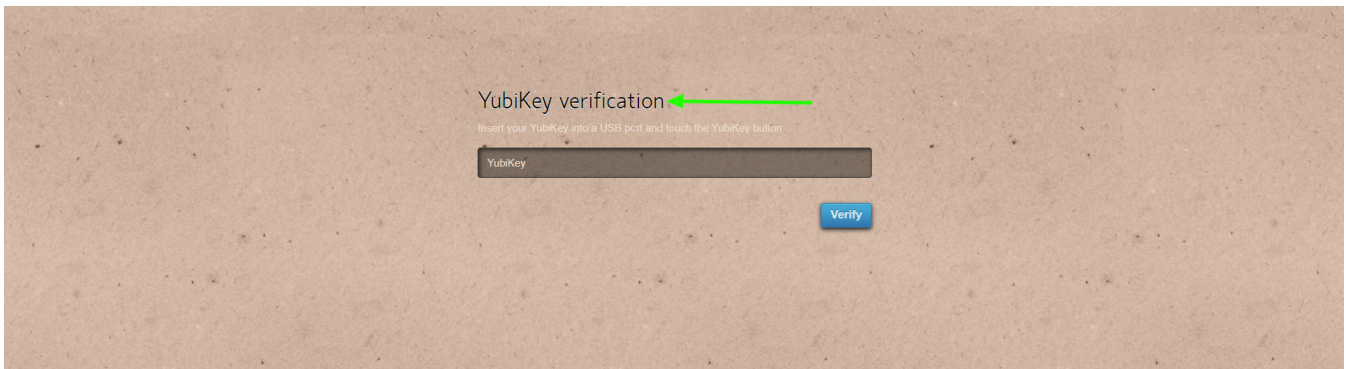


**Step 1(E):** The backend 2fa method will also be now using Yubikey.



## 2. Disable Yubikey 2FA from the GUI.

**Step 2(A):** To disable Yubikey from Ezeelogin GUI, navigate to **Settings -> General -> Two-factor Authentication** and [disable Yubikey](#).

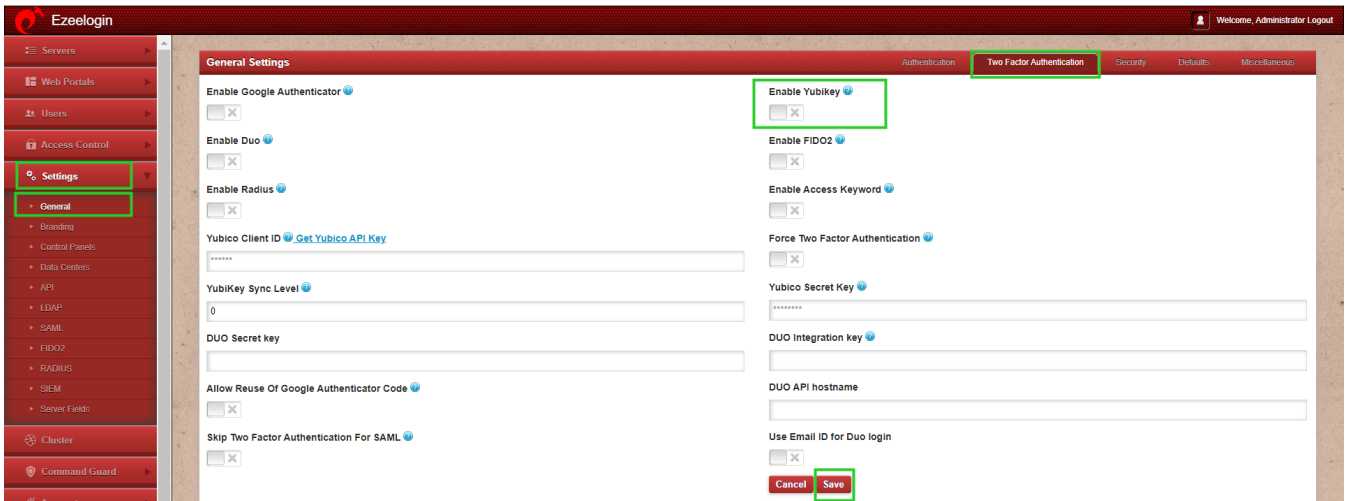

## Emergency CLI Method:

1. How do we disable Yubikey 2FA (Two-factor Authentication) from the backend?

Run the below commands to [disable and clear Google authenticator](#). Replace the username to disable Yubikey for that user.

```
root@gateway:~# php /usr/local/ezlogin/ez_queryrunner.php "update prefix_settings set value='N'
where(name='enable_yubikey')"
```

```
root@gateway:~# php /usr/local/ezlogin/ez_queryrunner.php "update prefix_users set eyk=NULL
where username='ezadmin'"
```

No Two-factor Authentication enabled

2. This error happens when we enforce Two-Factor authentication without enabling any of the Two-Factor authentications. Run the following command to disable **Force Two Factor Authentication**.

```
root@gateway:~# php /usr/local/ezlogin/ez_queryrunner.php "update prefix_settings SET value = 0
WHERE name = 'two_factor_auth'"
```

```
root@gateway:~# php /usr/local/ezlogin/ez_queryrunner.php "update prefix_usergroups SET
```

```
force_tfa = 'N'"
```

## Yubikey outbound URLs to be whitelisted:

Following are the Yubikey outbound URLs to be whitelisted in the firewall.

1. ['https://api.yubico.com/wsapi/2.0/verify'](https://api.yubico.com/wsapi/2.0/verify)
2. ['https://api2.yubico.com/wsapi/2.0/verify'](https://api2.yubico.com/wsapi/2.0/verify)
3. ['https://api3.yubico.com/wsapi/2.0/verify'](https://api3.yubico.com/wsapi/2.0/verify)
4. ['https://api4.yubico.com/wsapi/2.0/verify'](https://api4.yubico.com/wsapi/2.0/verify)
5. ['https://api5.yubico.com/wsapi/2.0/verify'](https://api5.yubico.com/wsapi/2.0/verify)

Yubikey Library requires access to the above URLs. Also, do check out the article for the list of YubiKey API servers that the YubiKey client would utilize [https://developers.yubico.com/yubikey-val/Getting\\_Started\\_Writing\\_Clients.html](https://developers.yubico.com/yubikey-val/Getting_Started_Writing_Clients.html)

## Related Articles:

[Disable all 2fa from the backend.](#)

[Enforce 2fa on user login.](#)

[Reset 2fa on Ezeelogin user.](#)

Online URL:

<https://www.ezeelogin.com/kb/article/how-to-configure-yubikey-two-factor-authentication-in-ssh-75.html>